




MAGNETO 48V


MAGNETO 48V



MAGNETO
48V

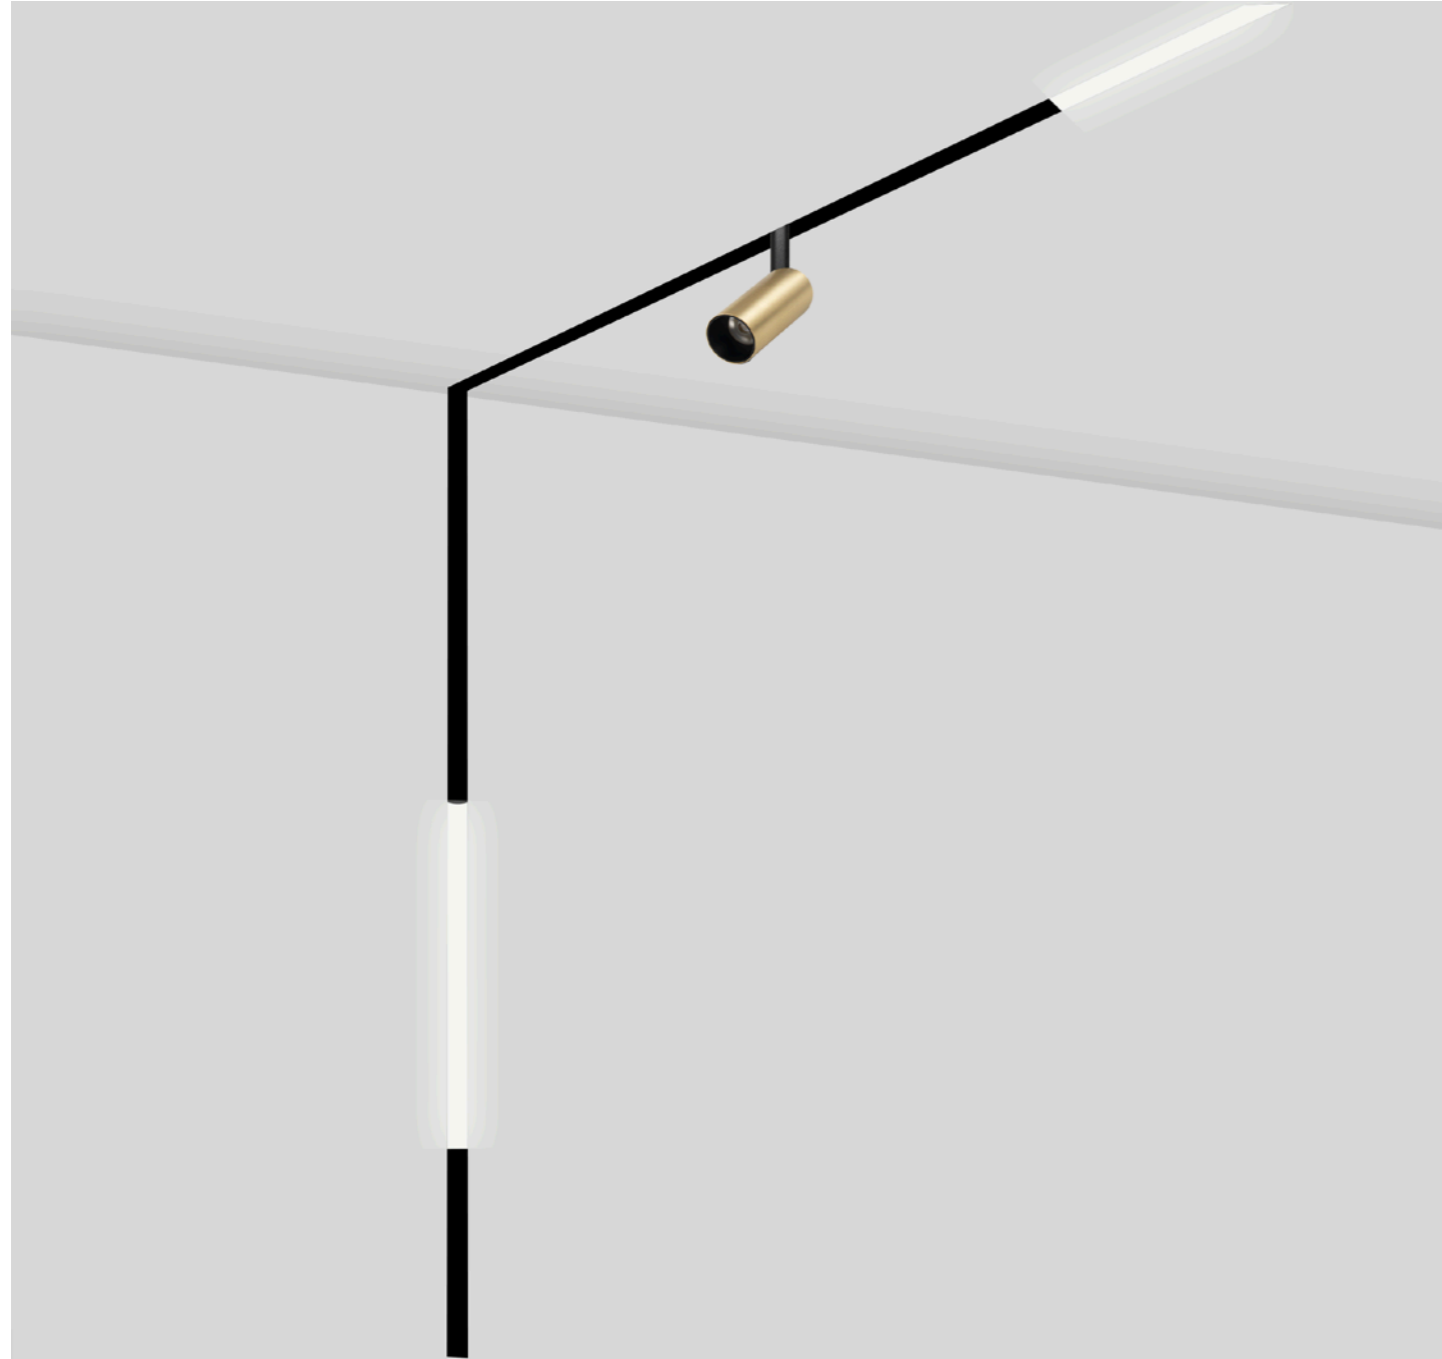

MAGNETO
48V

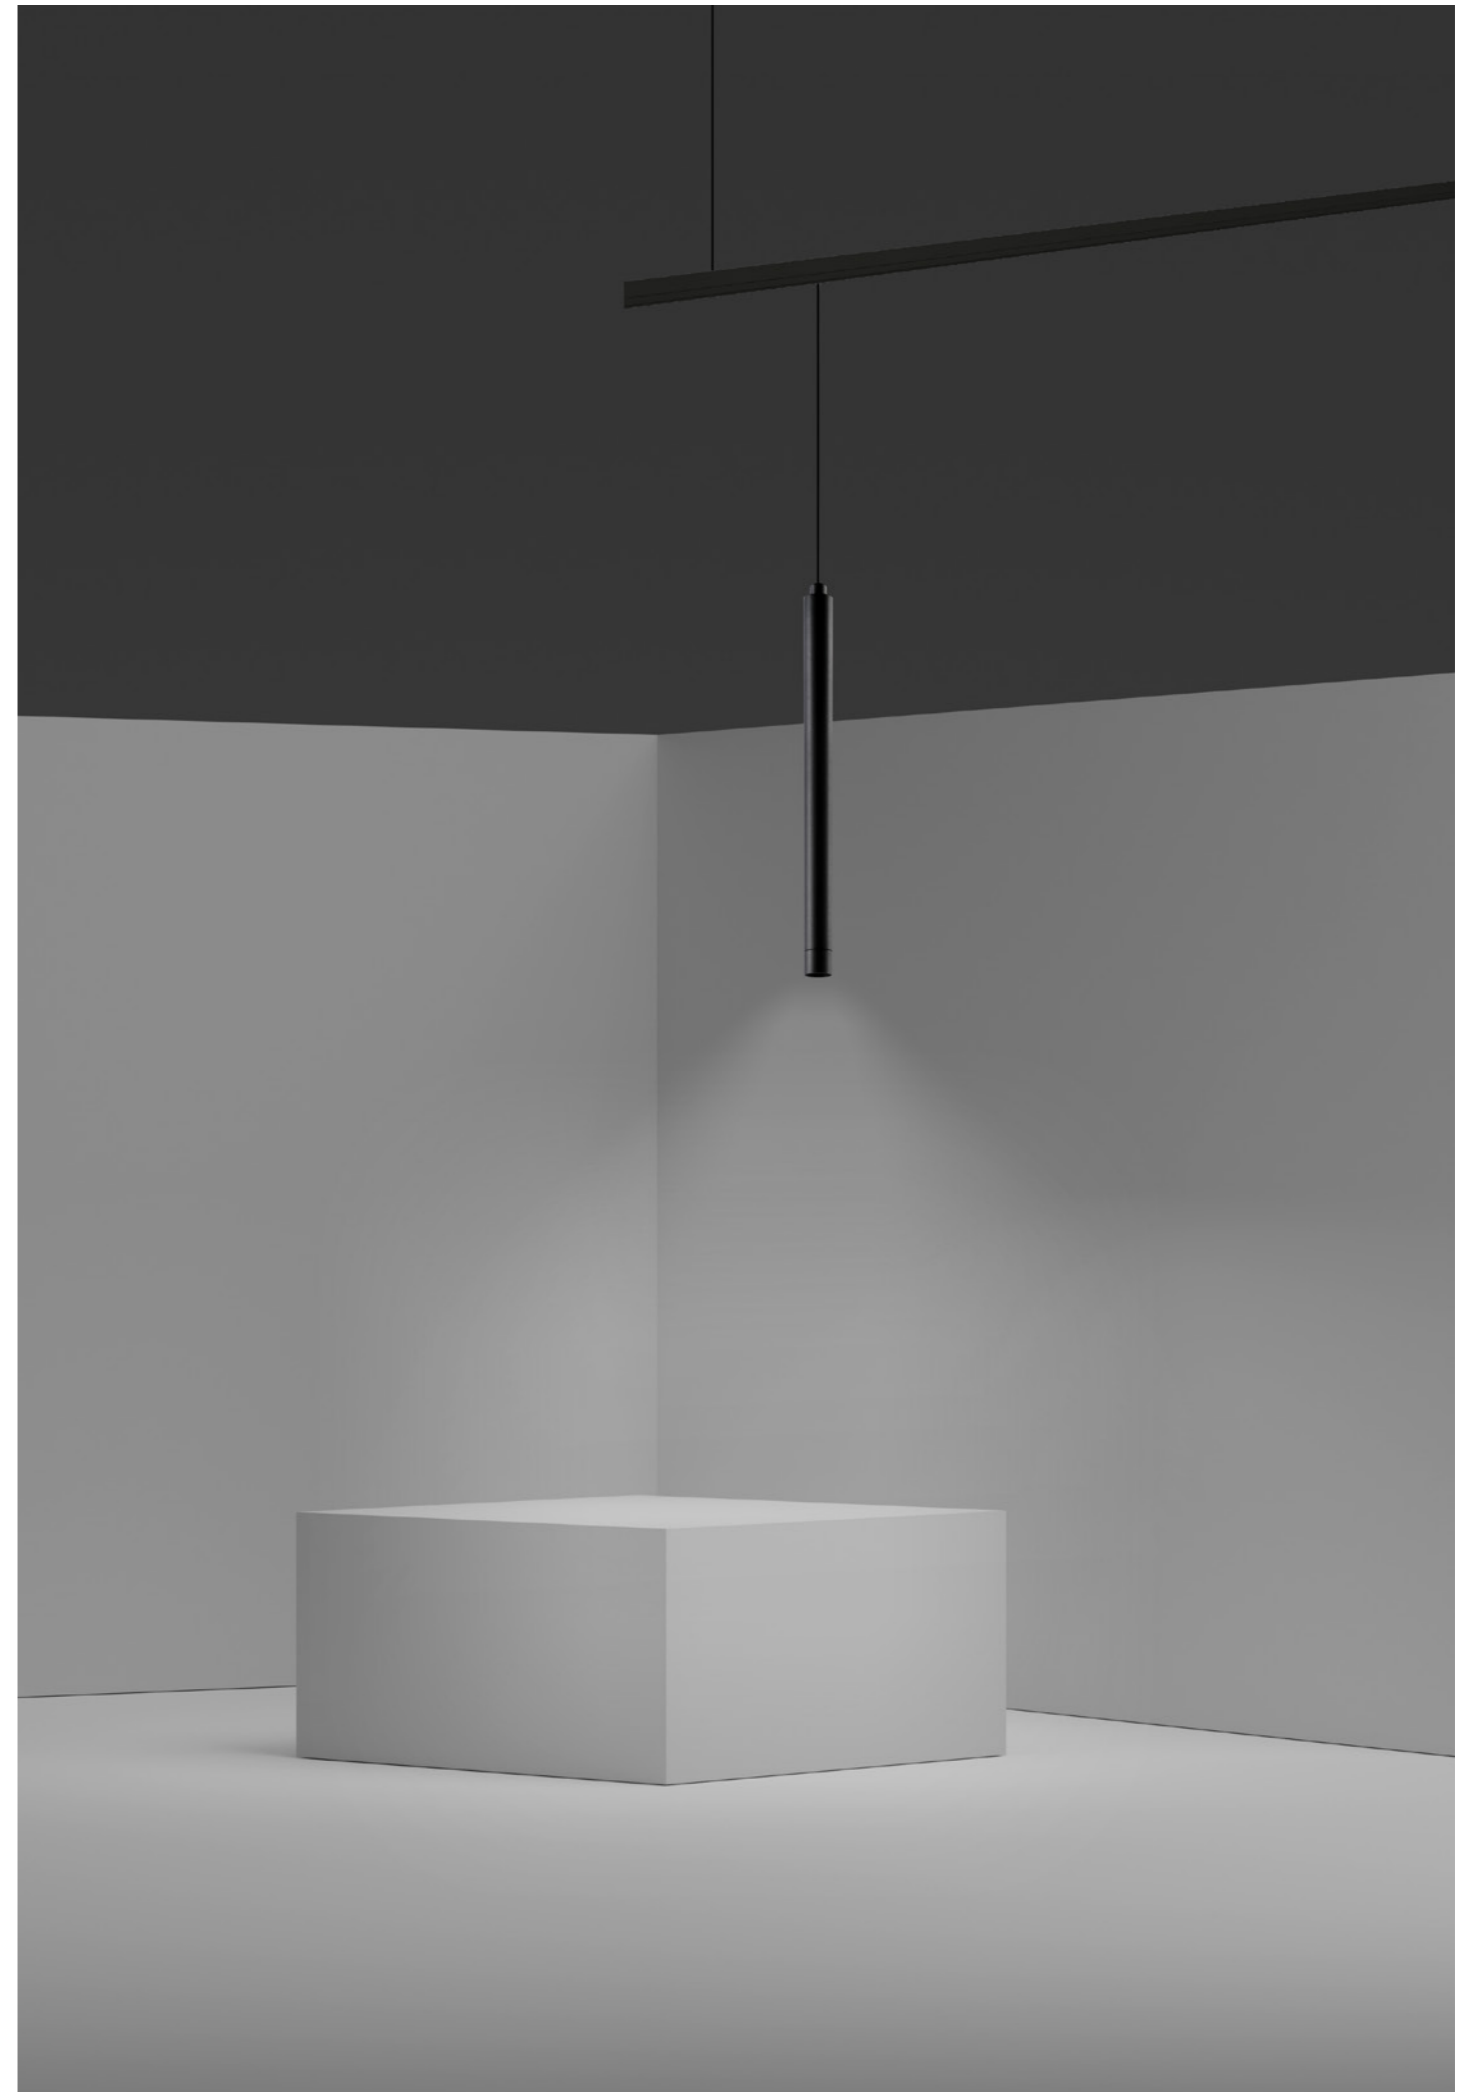

MAGNETO
48V



MAGNETO
48V



MAGNETO
48V









MAGNETO 48V

Foco - spot light

Foco - spot light



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8328	3000K	7W	38°	560lm	Negro-Black	On-off
8384	3000K	7W	38°	560lm	Oro-Gold	On-off
8345	3000K	7W	38°	560lm	Negro-Black	Dimmable
8388	3000K	7W	38°	560lm	Oro-Gold	Dimmable
				48V CRI≥ 90	Aluminio-Aluminium	




REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8315	3000K	5W	50°	400lm	Negro-Black	On-off
8381	3000K	5W	50°	400lm	Oro-Gold	On-off
8316	3000K	7W	38°	560lm	Negro-Black	On-off
8382	3000K	7W	38°	560lm	Oro-Gold	On-off
8317	3000K	20W	38°	1600lm	Negro-Black	On-off
8332	3000K	5W	50°	400lm	Negro-Black	Dimmable
8385	3000K	5W	50°	400lm	Oro-Gold	Dimmable
8333	3000K	7W	38°	560lm	Negro-Black	Dimmable
8386	3000K	7W	38°	560lm	Oro-Gold	Dimmable
8334	3000K	20W	38°	1600lm	Negro-Black	Dimmable
				48V CRI≥ 90	Aluminio-Aluminium	



MAGNETO 48V

Foco - spot light


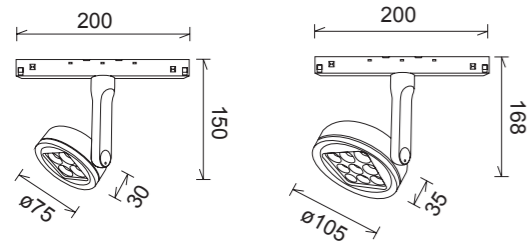


REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8325	3000K	10W	50°	800lm	Negro-Black	On-off
8326	3000K	20W	50°	1600lm	Negro-Black	On-off
8342	3000K	10W	50°	800lm	Negro-Black	Dimmable
8343	3000K	20W	50°	1600lm	Negro-Black	Dimmable

48V CRI ≥ 90 Aluminio-Aluminium



Foco lineal- Linear spot light


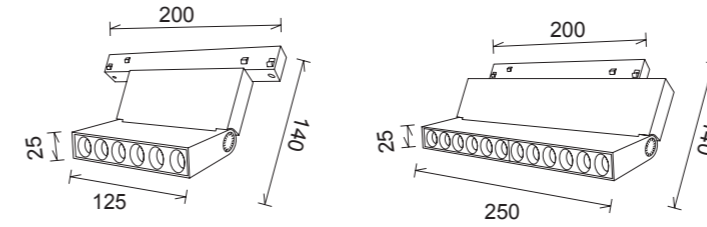
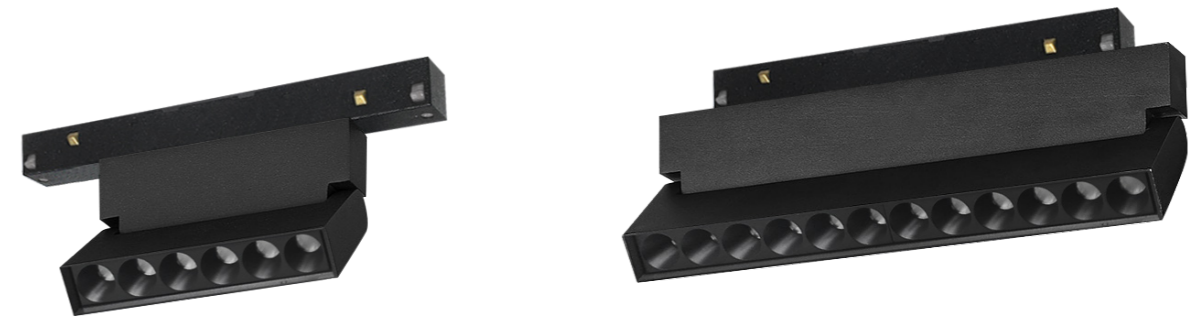




REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8323	3000K	10W	50°	800lm	Negro-Black	On-off
8324	3000K	20W	50°	1600lm	Negro-Black	On-off
8340	3000K	10W	50°	800lm	Negro-Black	Dimmable
8341	3000K	20W	50°	1600lm	Negro-Black	Dimmable

48V CRI ≥ 90 Aluminio-Aluminium







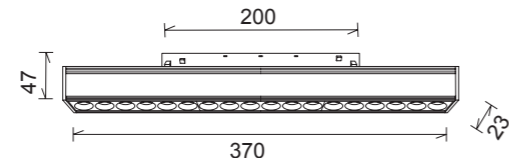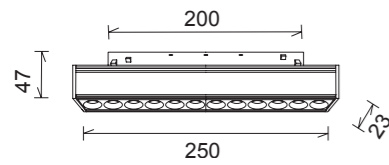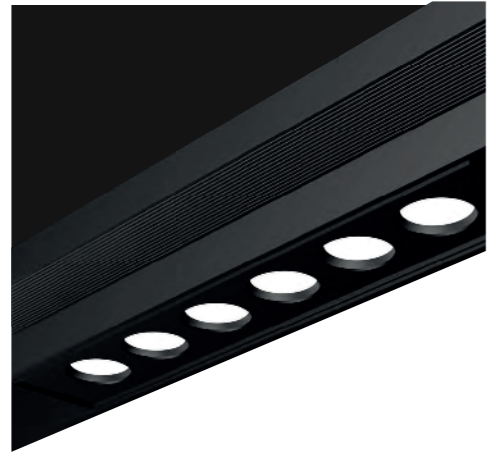


Modulo lineal COB-Linear light diffuser



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8320	3000K	12W	50°	960lm	Negro-Black	On-off
8321	3000K	18W	50°	1440lm	Negro-Black	On-off
8337	3000K	12W	50°	960lm	Negro-Black	Dimmable 
8338	3000K	18W	50°	1440lm	Negro-Black	Dimmable 
				48V CRI≥ 90	Aluminio-Aluminium	

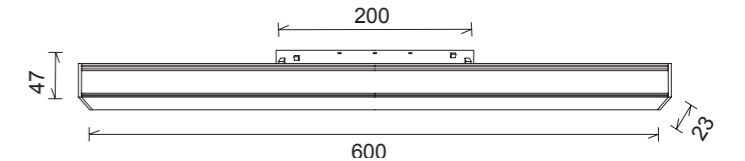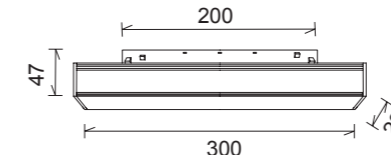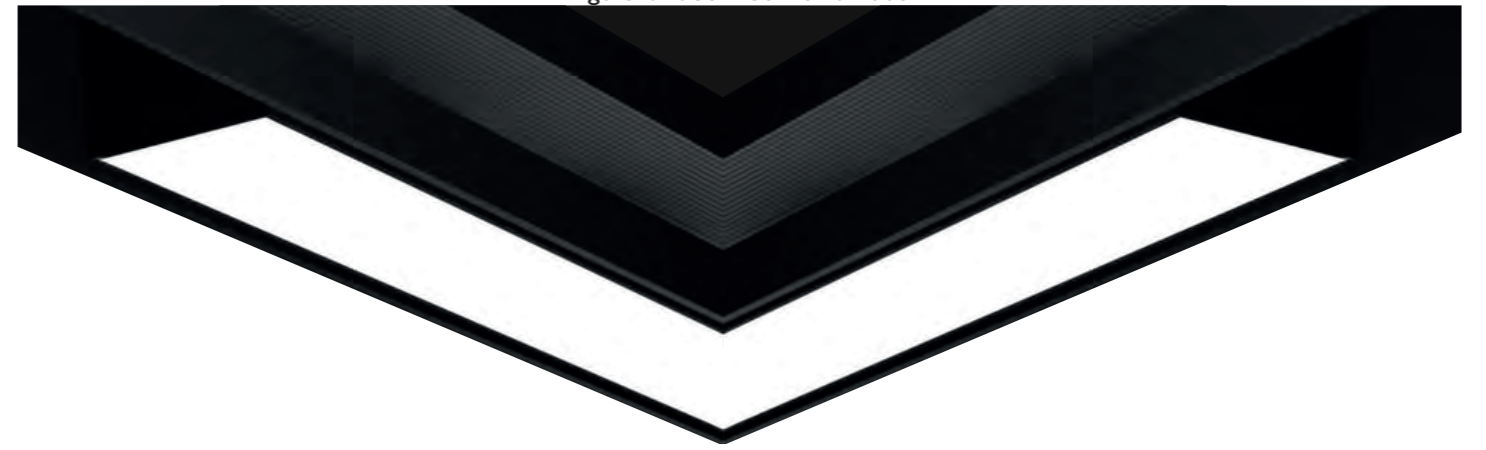Angulo difusor-Corner diffuser




REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8322	3000K	16W	120°	1280lm	Negro-Black	On-off
8339	3000K	16W	120°	1280lm	Negro-Black	Dimmable 
8318	3000K	8W	120°	640lm	Negro-Black	On-off
8319	3000K	16W	120°	1280lm	Negro-Black	On-off
8335	3000K	8W	120°	640lm	Negro-Black	Dimmable 
8336	3000K	16W	120°	1280lm	Negro-Black	Dimmable 
				48V CRI≥ 90	Aluminio-Aluminium	



MAGNETO 48V

Colgante - Pendant

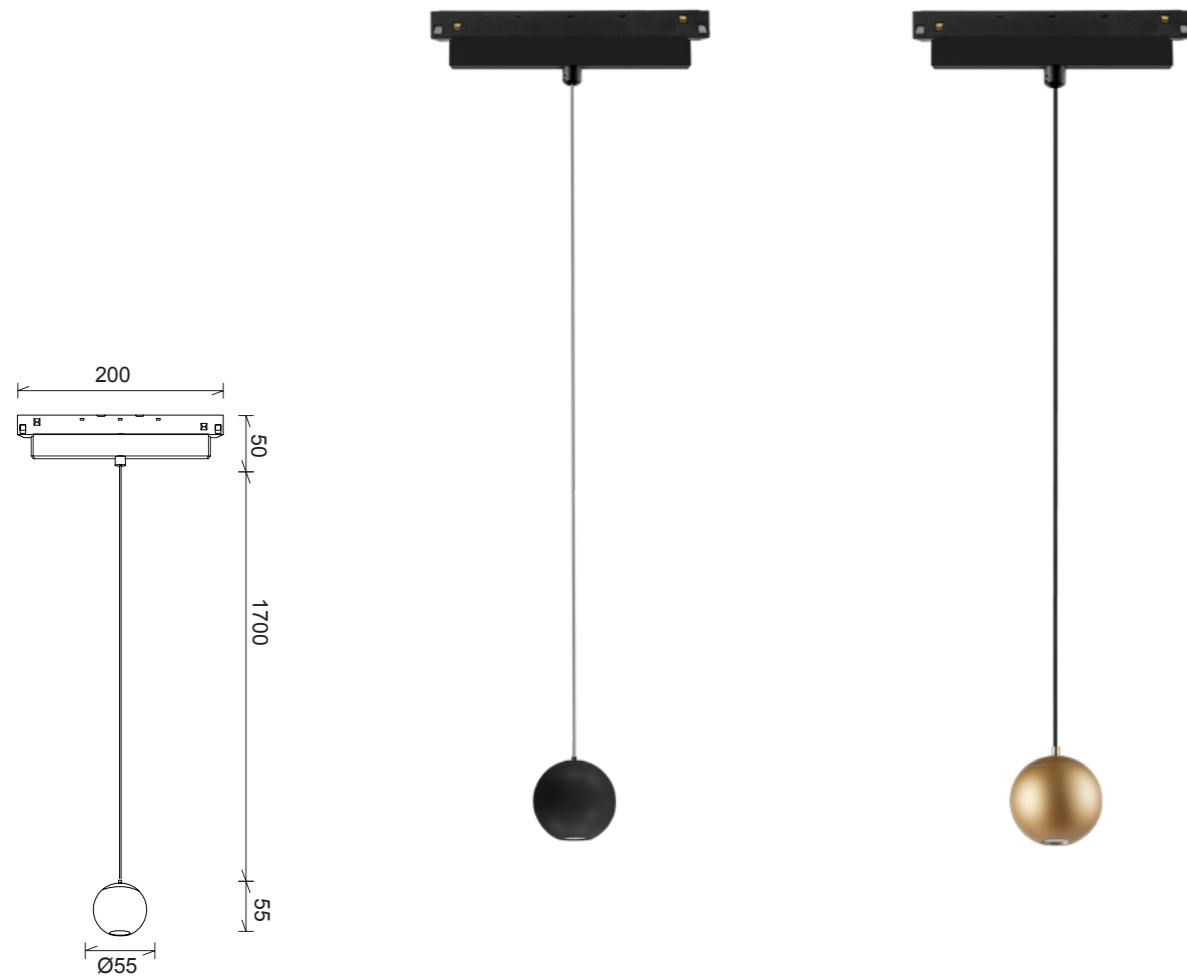

REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8327	3000K	7W	38°	560lm	Negro-Black	On-off	
8383	3000K	7W	38°	560lm	Oro-Gold	On-off	
8344	3000K	7W	38°	560lm	Negro-Black	Dimmable	
8387	3000K	7W	38°	560lm	Oro-Gold	Dimmable	
				48V CRI≥ 90	Aluminio-Aluminium		

Colgante - Pendant






REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH		
8441	3000K	10W	110°	800lm	Negro-Black	On-off	
8442	3000K	10W	110°	800lm	Oro-Gold	On-off	
8443	3000K	10W	110°	800lm	Negro-Black	Dimmable	
8444	3000K	10W	110°	800lm	Oro-Gold	Dimmable	
				48V CRI≥ 90	Aluminio-Aluminium		



MAGNETO 48V

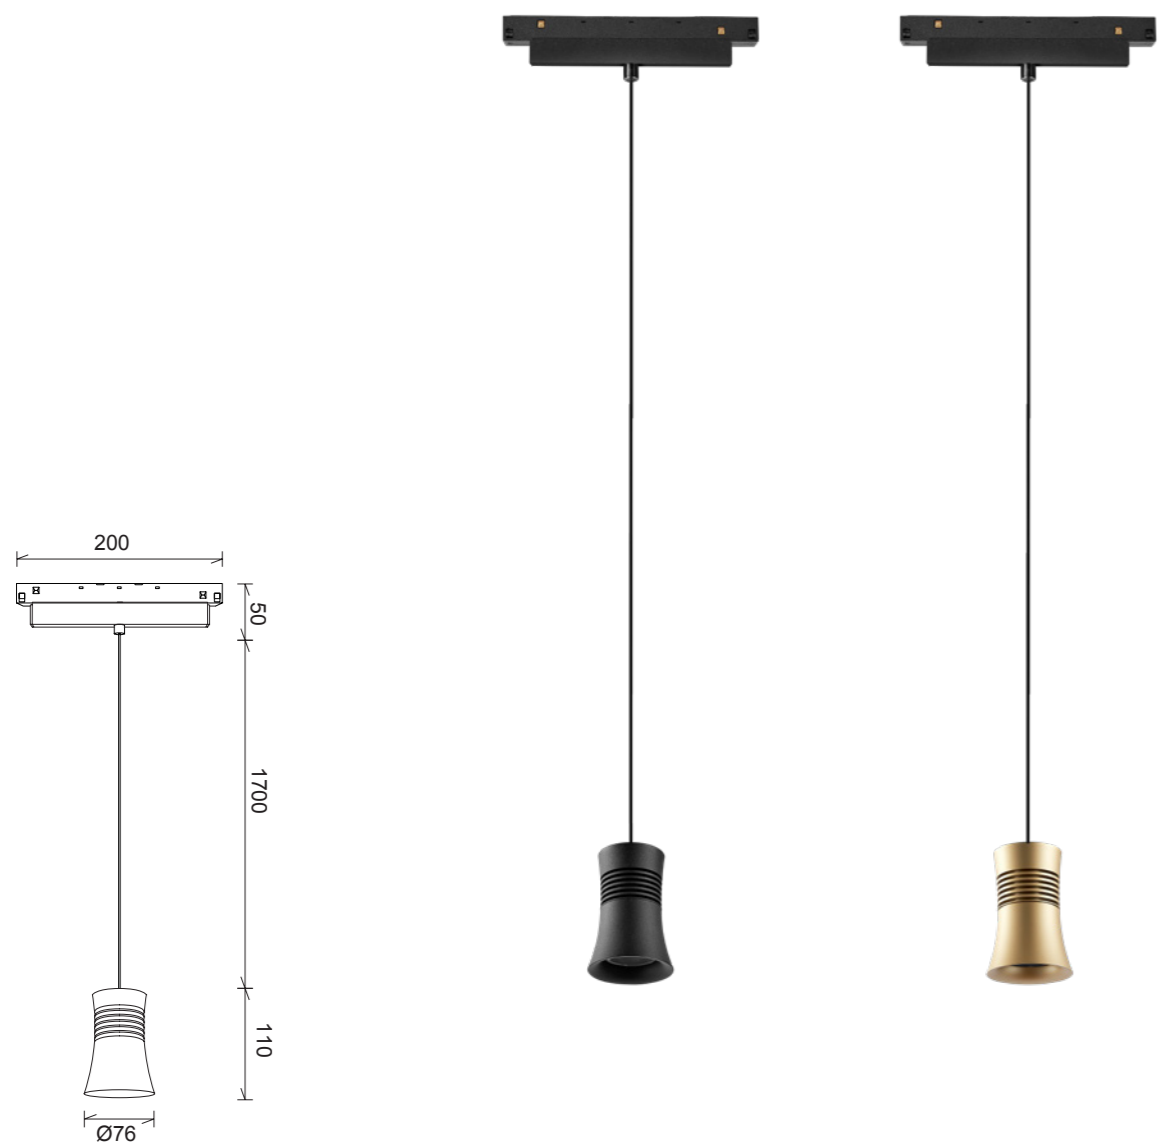

Colgante Pagoda- Pendant Pagoda



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8389	3000K	12W	38°	950lm	Negro-Black	On-off
8390	3000K	12W	38°	950lm	Oro-Gold	On-off
8391	3000K	12W	38°	950lm	Negro-Black	Dimmable 
8392	3000K	12W	38°	950lm	Oro-Gold	Dimmable 
				48V CRI≥ 90	Aluminio-Aluminium	

Colgante - Pendant



REFERENCE	K	LED WATT	BEAM ANGLE	LUMENS	FINISH	
8329	3000K	5W	38°	400lm	Negro-Black	On-off
8346	3000K	5W	38°	400lm	Negro-Black	Dimmable 
8445	3000K	7W	38°	560lm	Oro/Negro-Gold/black	On-off
8446	3000K	7W	38°	560lm	Oro/Negro-Gold/black	Dimmable 
				48V CRI≥ 90	Aluminio-Aluminium	




Carril de empotrar-*Recessed track*



Los carriles empotrados permiten una fusión total, creando infinitas soluciones para la iluminación de espacios interiores, con el refinamiento y la discreción de un sistema que ofrece un diseño moderno, minimalista y sereno.

The recessed rails allow a total fusion, creating unlimited solutions for the lighting of interior spaces, with the refinement and discretion of a system that offers a modern, minimalist and serene design.

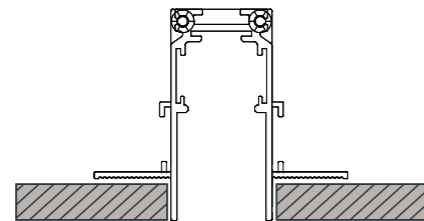


Carril de superficie-*Surface mounted track*



Los carriles de superficie son soluciones diseñadas para cualquier zona de instalación. Su particular diseño lo convierte en protagonista absoluto del espacio.

Surface rails are solutions designed for any installation area. Its particular design makes it the absolute protagonist of the space.

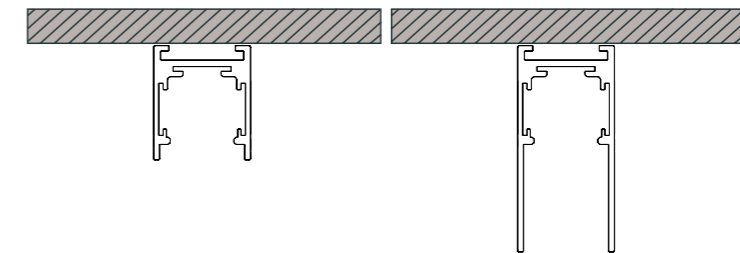


MAGNETO 48V

SURFACE TRACK


8300 Track length 1000 mm

8301 Track length 2000 mm

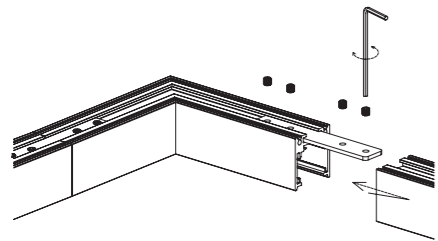


TRACK ACCESSORIES


8304 L-joint 90° plates incl.

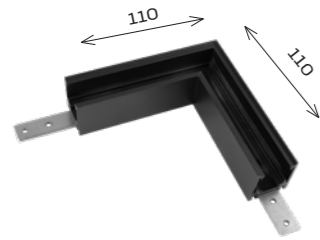

8305 Wall to wall connector (**in**) plates incl.

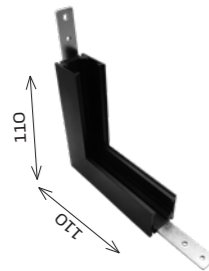

8306 Wall to wall connector (**out**) plates incl.



8303 Top track connection plate



8314 Live end (connector)




8313 Live end (feeder)



8302 Set 2 end caps



8377 Suspension kits (2 wires)

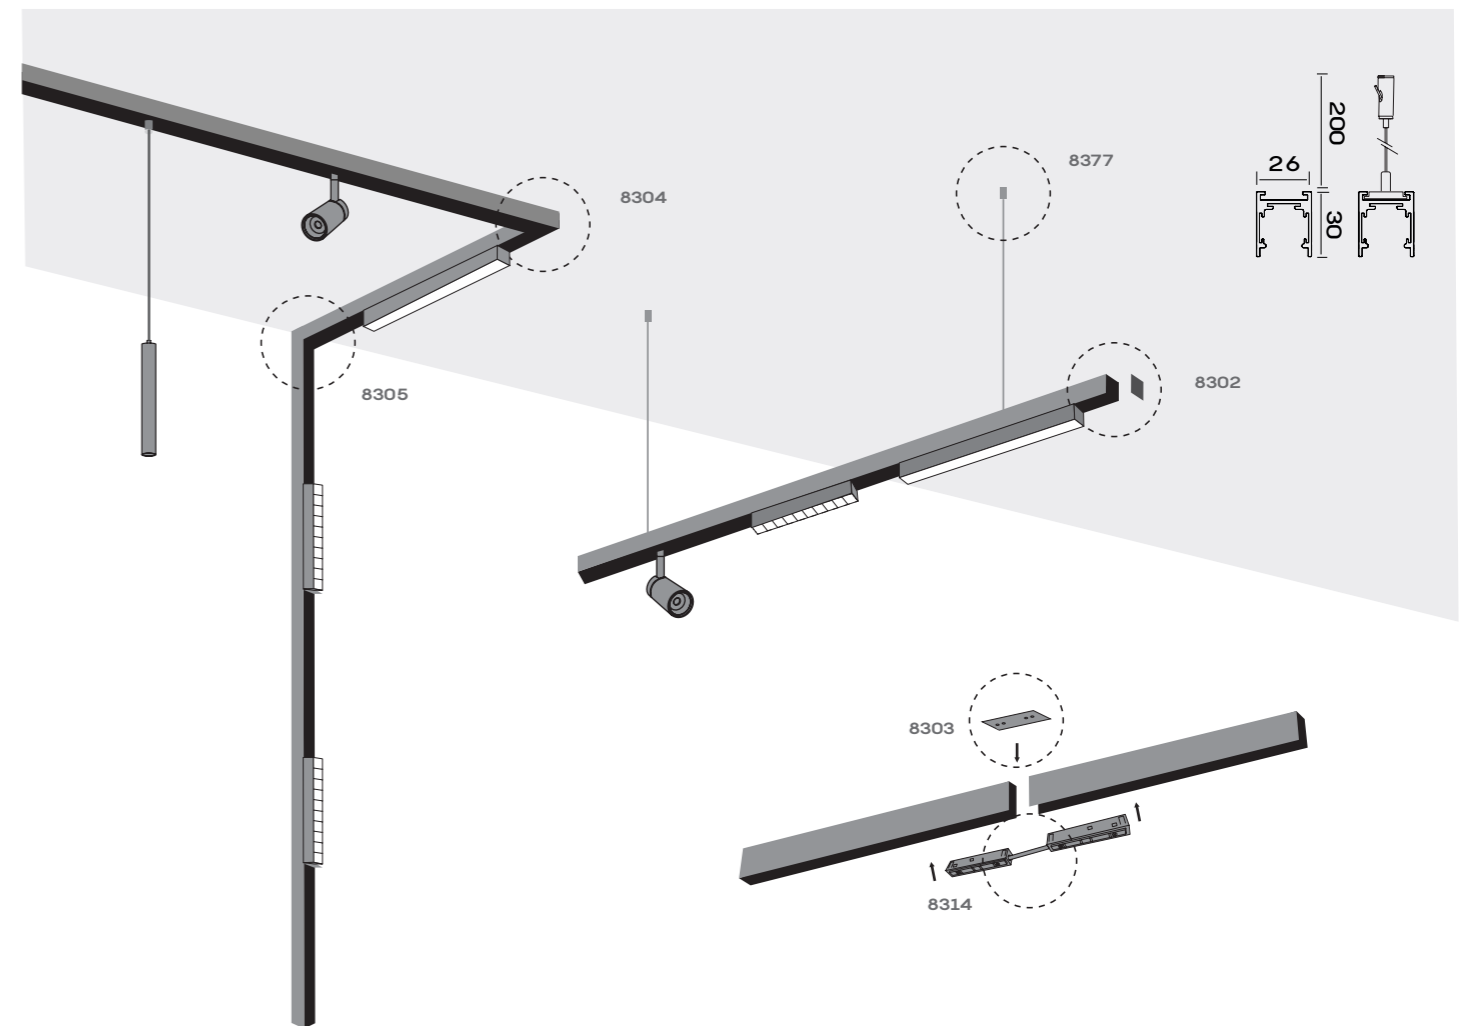


Input voltage DC48V — max load-up to 300W — max track length-50m

MAGNETO 48V

SURFACE TRACK


8371 Track length 1000 mm

8372 Track length 2000 mm

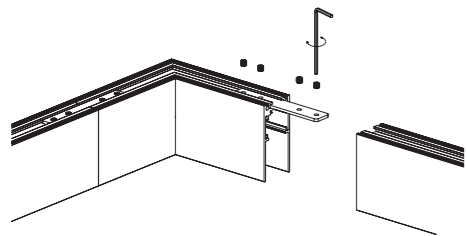


TRACK ACCESSORIES


8374 L-joint 90° plates incl.



8375 Wall to wall connector (in) plates incl.



8376 Wall to wall connector (out) plates incl.



8303 Top track connection plate



8314 Live end (connector)




8313 Live end (feeder)





8373 Set 2 end caps



8377 Suspension kits (2 wires)



Input voltage DC48V — max load-up to 300W — max track length-50m

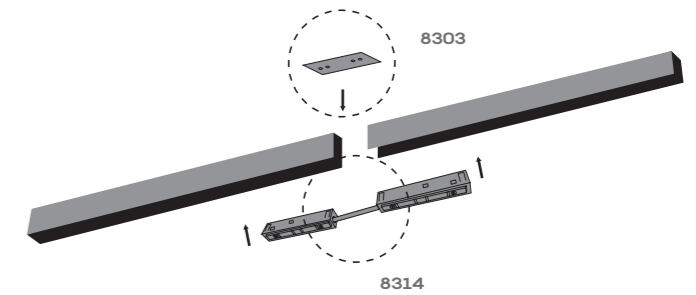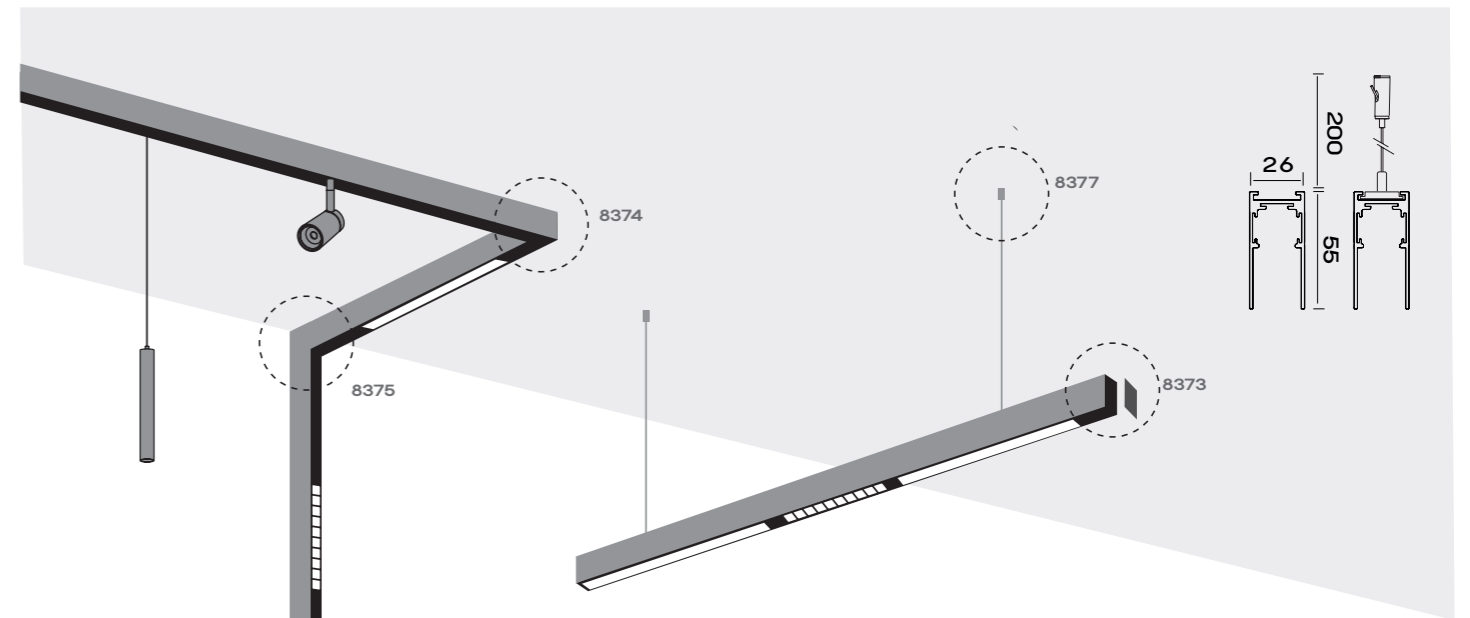


* Tapa incluida-Cover included

MAGNETO 48V

RECESSED TRACK


8307 Track length 1000 mm

8308 Track length 2000 mm

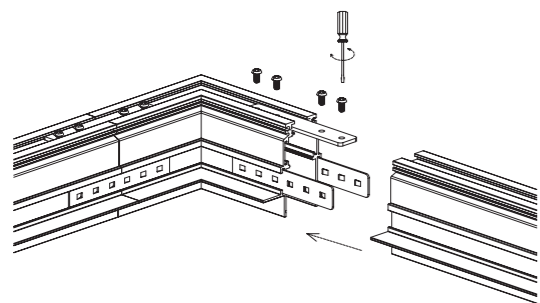


TRACK ACCESSORIES


8309 L-joint 90° plates incl.



8310 Wall to wall connector (in) plates incl.



8311 Wall to wall connector (out) plates incl.

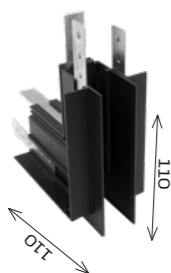

8312 Side track connection plate ×2



8303 Top track connection plate



8314 Live end (connector)





8313 Live end (feeder)



■ Brown +48V

■ Blue -48V

8373 Set 2 end caps

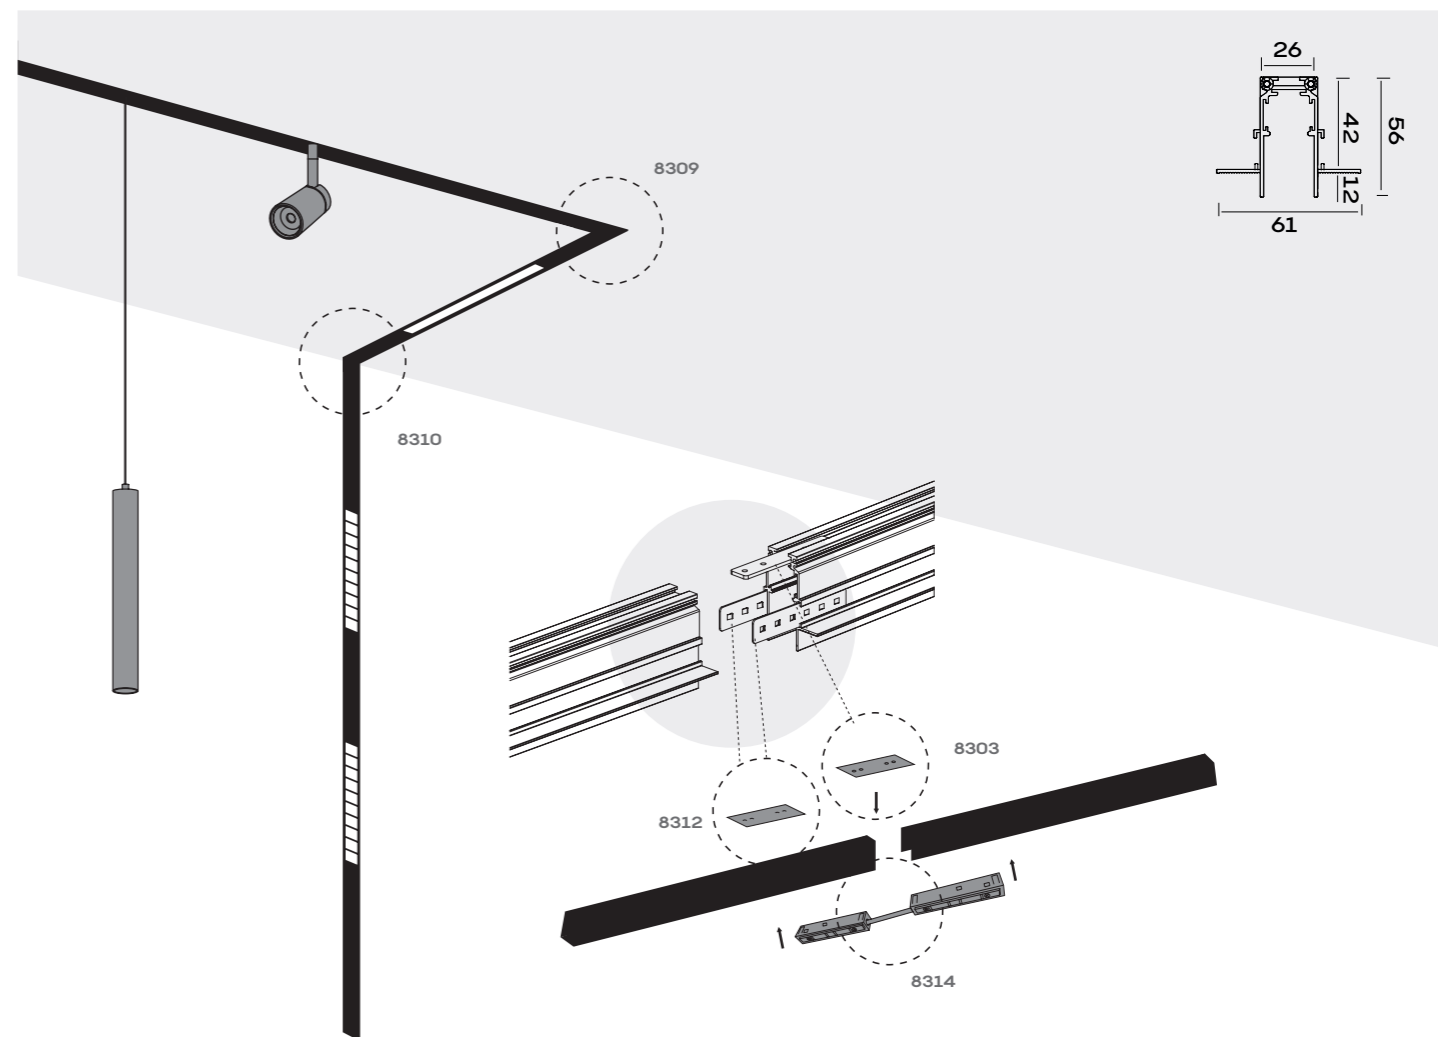


* Tapa incluida-Cover included

Input voltage DC48V — max load-up to 300W — max track length-50m

ALIMENTADORES-DRIVERS

Tension constante 48v
48v Constant voltage

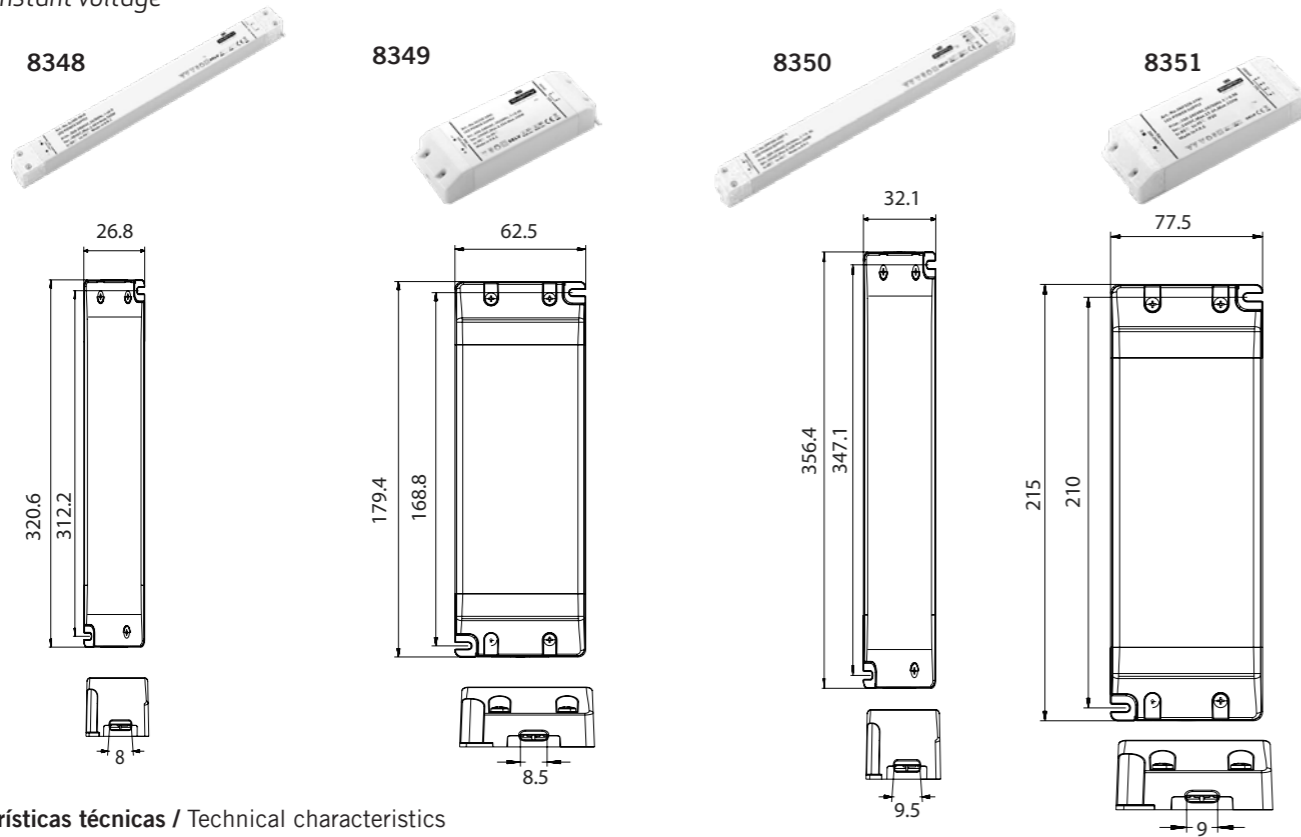


Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltage	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx. envolvente Max temp. at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
8348	SL100-48VF-1	200-240V	0-100	48	2.05	$\geq 0,95$	50/60	90°	-20...+45°	20
8349	SS150-48VL	200-240V	0-150	48	3.12	$\geq 0,95$	50/60	90°	-20...+45°	20
8350	SL240-48VF	220-240V	0-240	48	5.00	$\geq 0,95$	50/60	90°	-20...+45°	20
8351	SNP320-48VL-1	220-240V	0-320	48	6.67	$\geq 0,95$	50/60	90°	-20...+45°	20

REGULABLE/DIMMABLE




NO REGULABLE/NO DIMMABLE

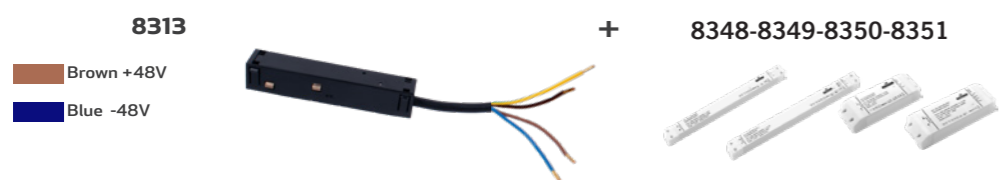

ALIMENTADORES-DRIVERS

Tension constante 48v
48v Constant voltage

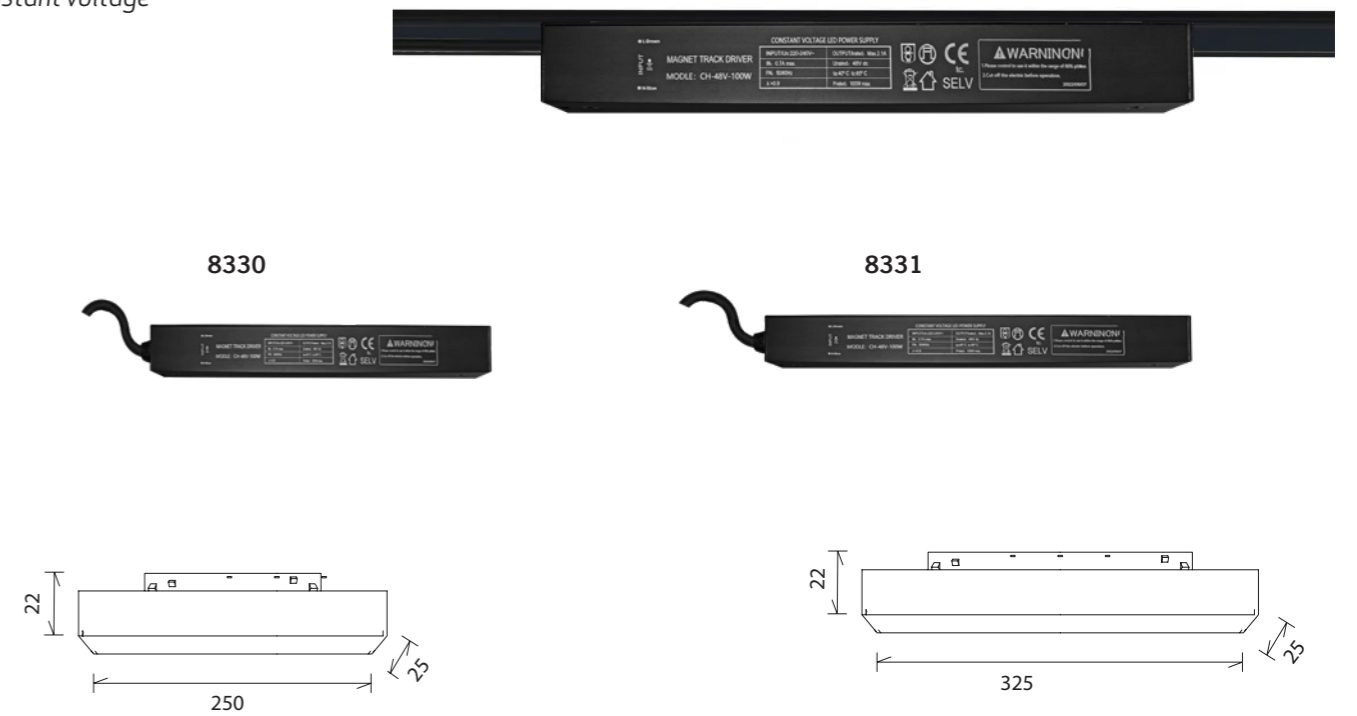


Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltage	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx. envolvente Max temp. at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (°C)	ta (°C)	IP
8330		220-240V	0-100	48	1.25	$\geq 0,95$	50/60	85°	-20...+45°	20
8331		200-240V	0-200	48	2.5	$\geq 0,7$	50/60	80°	-20...+50°	20



SISTEMA REGULACIÓN TENSIÓN CONSTANTE TRIAC 48v
48v CONSTANT VOLTAGE DIMMING TRIAC SYSTEM

V1-S

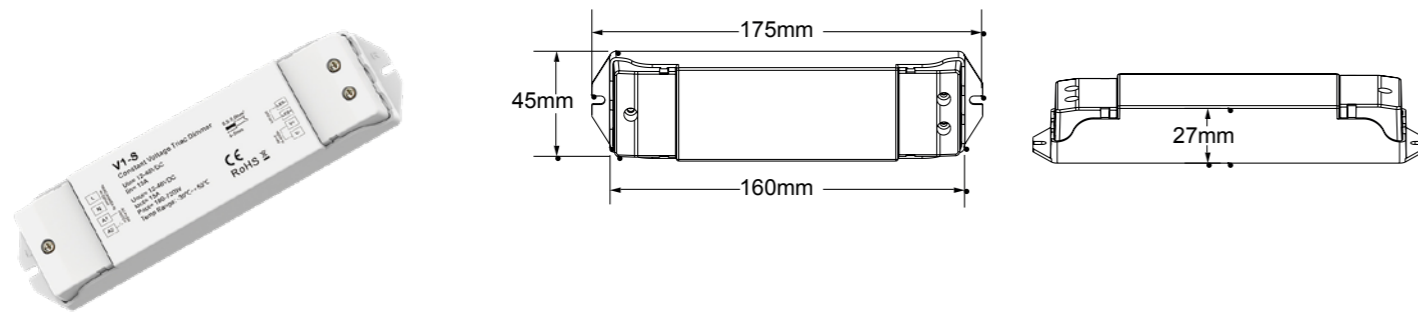

Permite la regulación de tiras led monocolor (12/24/36V) y carriles magnéticos de 48V.

Puede regular con mecanismos TRIAC y mecanismos pulsadores standard (PUSH).

Puedes conectar varios al mismo mecanismo PUSH; puedes conectar un PUSH y un TRIAC al mismo tiempo.

máx.entrada: 15A / máx.salida: 1 canal de 15A.

Protección contra sobrecargas eléctricas, cortocircuitos y sobrecalentamiento.

Señal entrada regulador AC 40-220v.

Allows to control single color LED strips (12/24/36 V) and 48V magnetic tracks.

Suitable for TRIAC controllers and standard PUSH switches.

You may connect several to the same PUSH switch; also you may connect PUSH switch and TRIAC dimmer at the same time.

max.Input: 15A / max.Output: 1 channel -15A.


Protection against over current, short circuit & over temperature

Input dimmig signal AC 40-220v.


Esquema de conexión / Connection diagram

Ref.	Input-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output power	Tipo tira Led/magnetic Led strip type/magnetic	Control a través de Control made by
	V	mA	A	12V 24V 36V 48V	Monocolor	Pulsador standard y/o triac
8347	12-48VDC	PWM PUSH TRIAC	1CH,15A	180W 360W 540W 720W	MONOC. DIM (1CH)	Standard push switch and/or triac


Estructuras e Instalaciones Mecánicas / Mechanical Structures and Installations

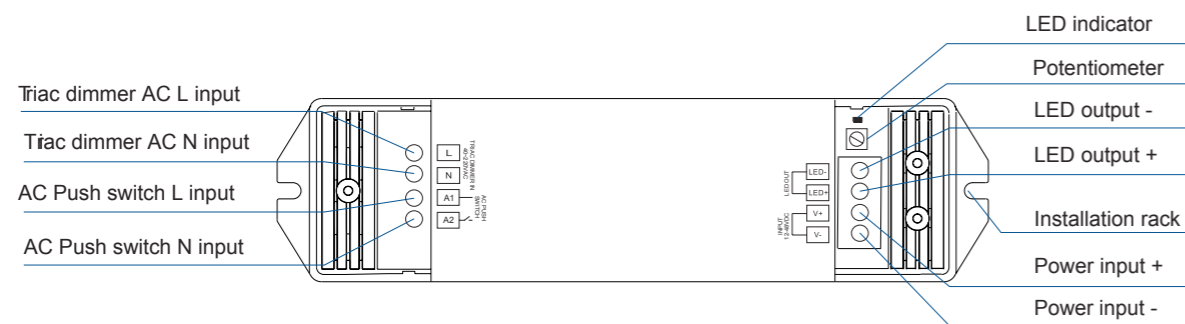


Conecte el atenuador Triac con un solo cable, sin cable neutro.
Connect single wire Triac dimmer, without neutral wire.



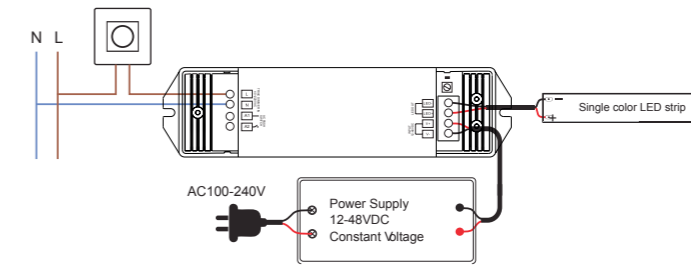


Conecte el atenuador Triac con entrada de cable neutro
Connect Triac dimmer with neutral wire input

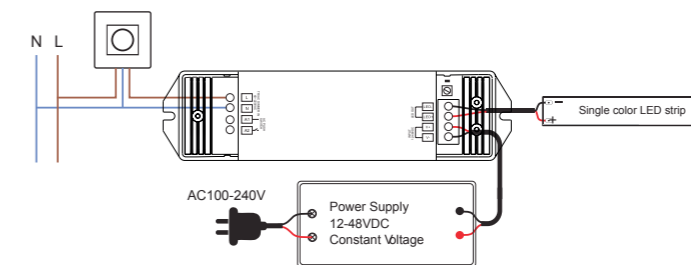

Conectar con el interruptor Push de CA
Connect with AC push switch

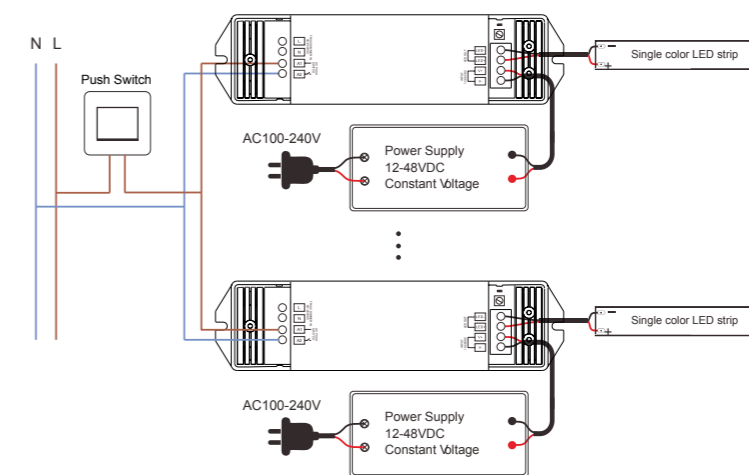

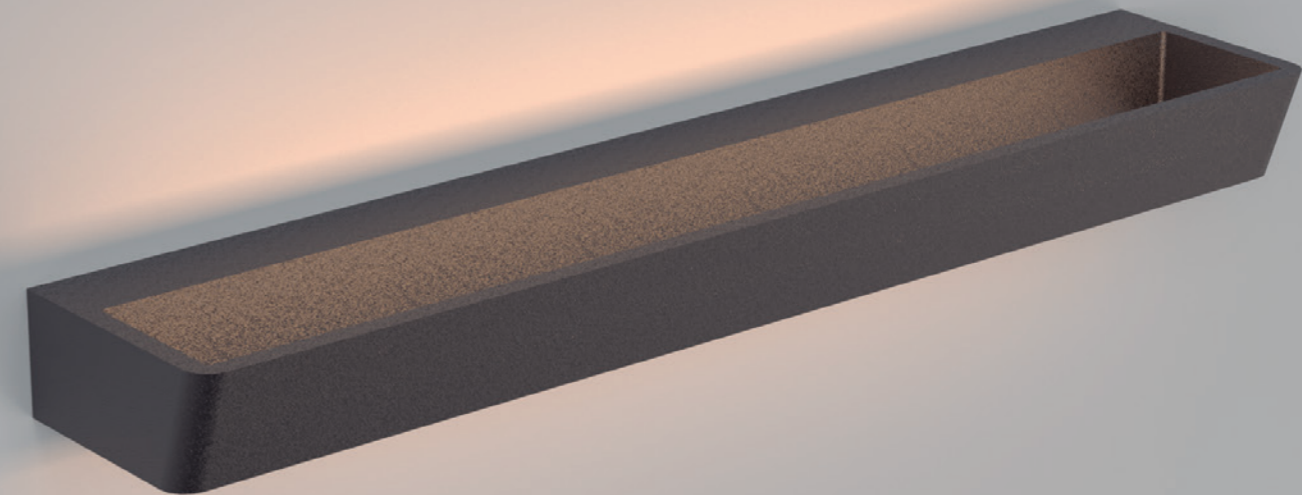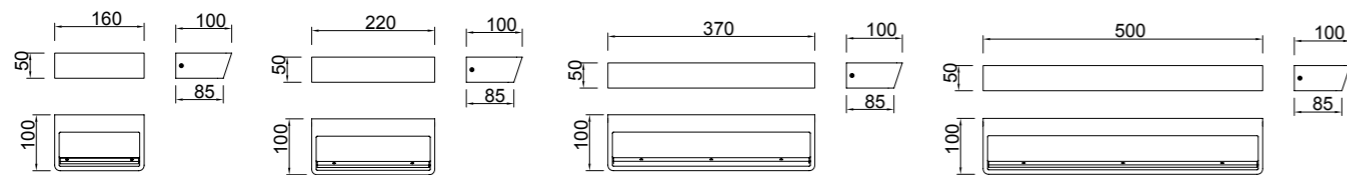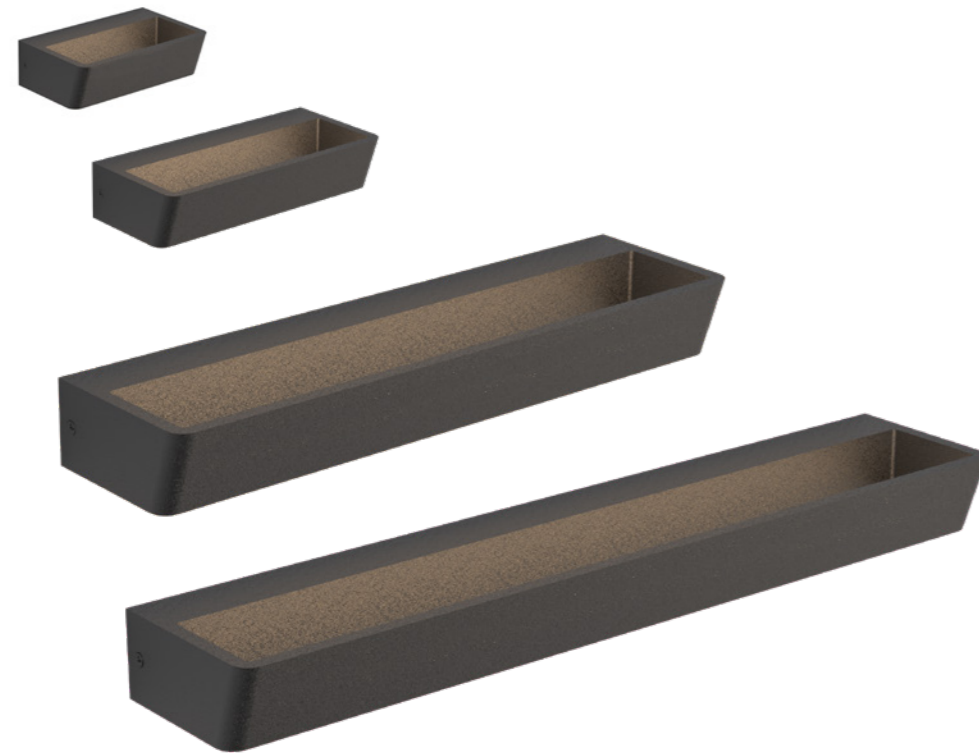


REFERENCE	K	LED WATT	LUMENS	FINISH
New 8367	3000K	15W	1200lm	Negro arena-Sand black
New 8368	3000K	21W	1680lm	Negro arena-Sand black
New 8369	3000K	30W	2400lm	Negro arena-Sand black
New 8370	3000K	40W	3200lm	Negro arena-Sand black
220-240V ~ 50/60Hz CRI:≥ 80				Aluminio/Acrílico-Aluminium/Acrylic




TOBAGO

Apliques-Wall lights

Indoor

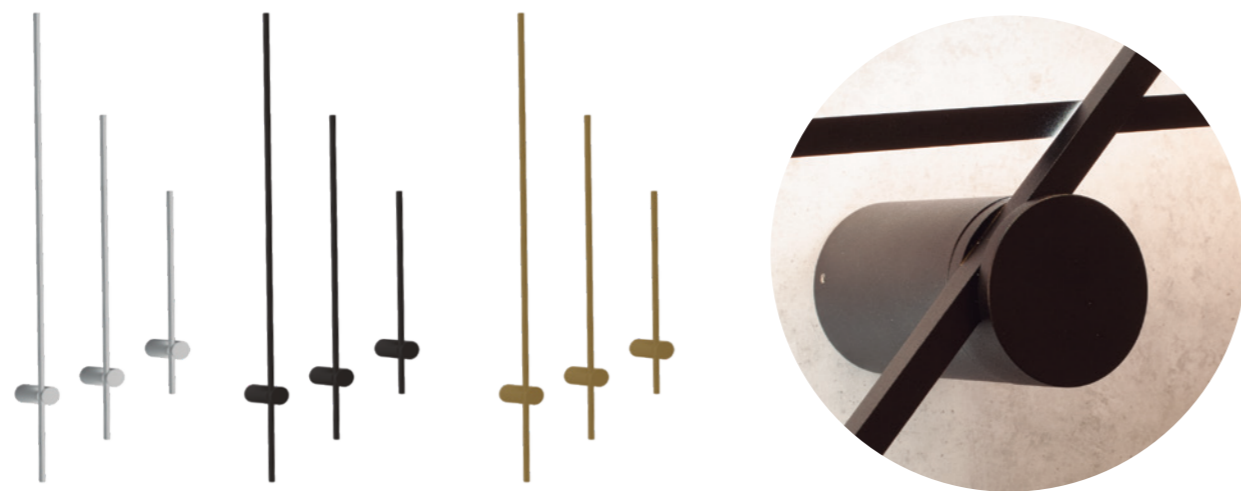

	REFERENCE	K	LED WATT	LUMENS	FINISH
New	7865	3000K	7W	590lm	Oro-Gold
	7910	3000K	7W	590lm	Blanco-White
	7913	3000K	7W	590lm	Negro-Black
New	7866	3000K	9W	760lm	Oro-Gold
	7911	3000K	9W	760lm	Blanco-White
	7914	3000K	9W	760lm	Negro-Black
New	7867	3000K	12W	1010lm	Oro-Gold
	7912	3000K	12W	1010lm	Blanco-White
	7915	3000K	12W	1010lm	Negro-Black
			220-240V ~ 50/60Hz	CRi: ≥ 90	Aluminio-Aluminium

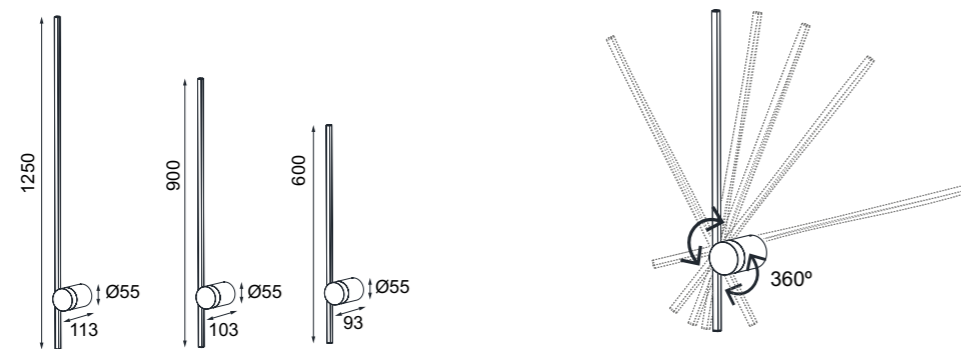






CRi ≥ 90



UGR<19 CRI≥90



UGR<19 CRI≥90

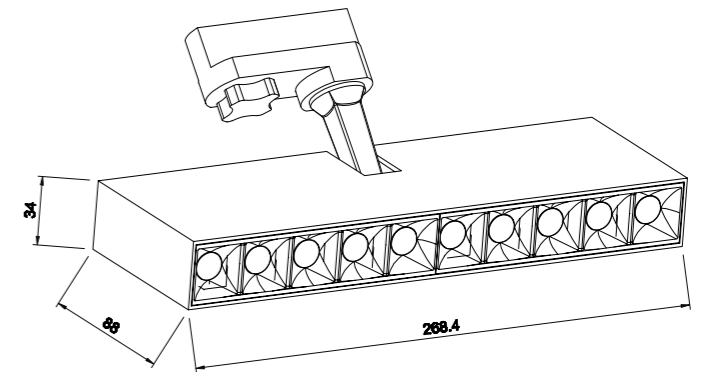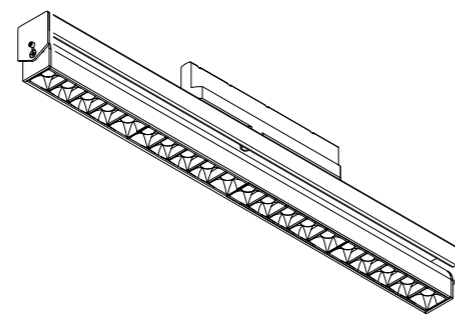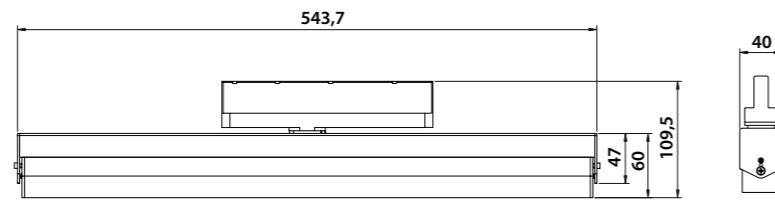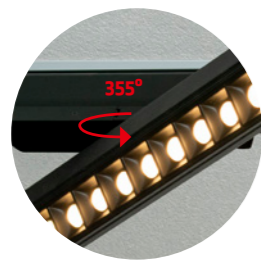

REFERENCE	K	LED WATT	LUMENS	FINISH
New 8359	3000K	30W	2350lm	Blanco-White
New 8360	3000K	30W	2350lm	Negro-Black
New 8361	4000K	30W	2400lm	Blanco-White
New 8362	4000K	30W	2400lm	Negro-Black
220-240V~ 50/60Hz CRI≥90				Aluminio-Aluminium

REFERENCE	K	LED WATT	LUMENS	FINISH
New 8363	3000K	30W	2350lm	Blanco-White
New 8364	3000K	30W	2350lm	Negro-Black
New 8365	4000K	30W	2400lm	Blanco-White
New 8366	4000K	30W	2400lm	Negro-Black
220-240V~ 50/60Hz CRI≥90				Aluminio-Aluminium





BOLONIA

Colgante-Pendant lamp


Indoor




36°




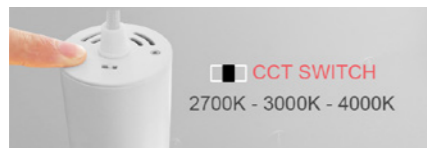
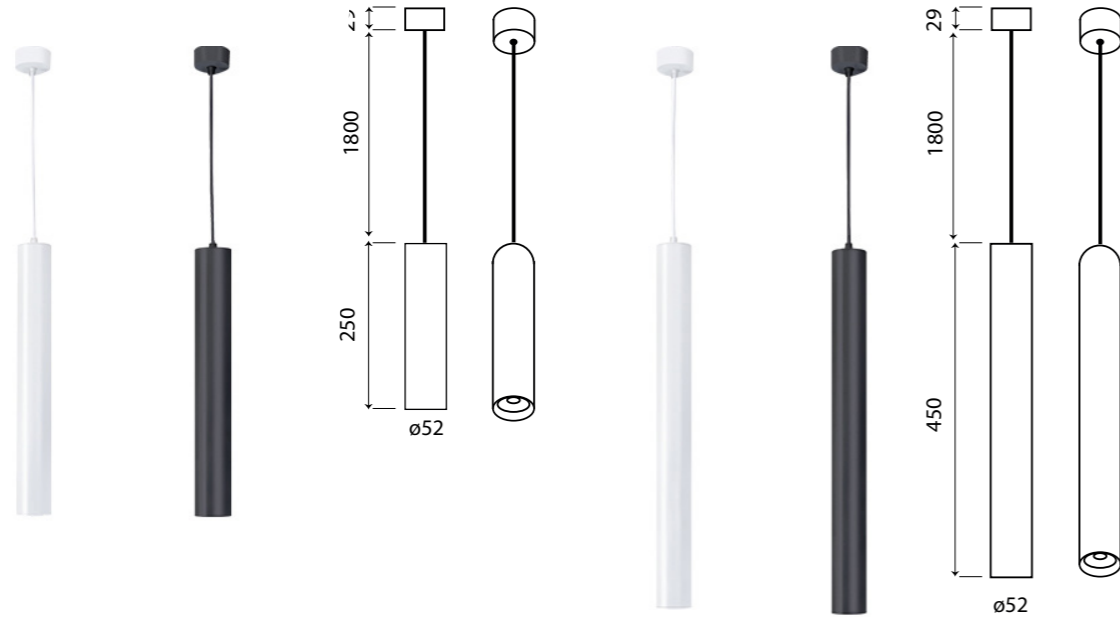


CCT SWITCH
2700K - 3000K - 4000K

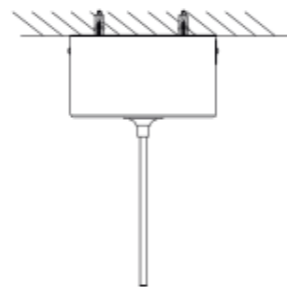


REFERENCE	CCT switch	LED WATT	LUMENS	FINISH
New 8355	2700K-3000K-4000K	7W	560lm	Blanco-White
New 8356	2700K-3000K-4000K	7W	560lm	Negro-Black
New 8357	2700K-3000K-4000K	10W	770lm	Blanco-White
New 8358	2700K-3000K-4000K	10W	770lm	Negro-Black
	UGR<19	220-240V~ 50/60Hz	CRI: ≥ 80	Aluminio-Aluminium

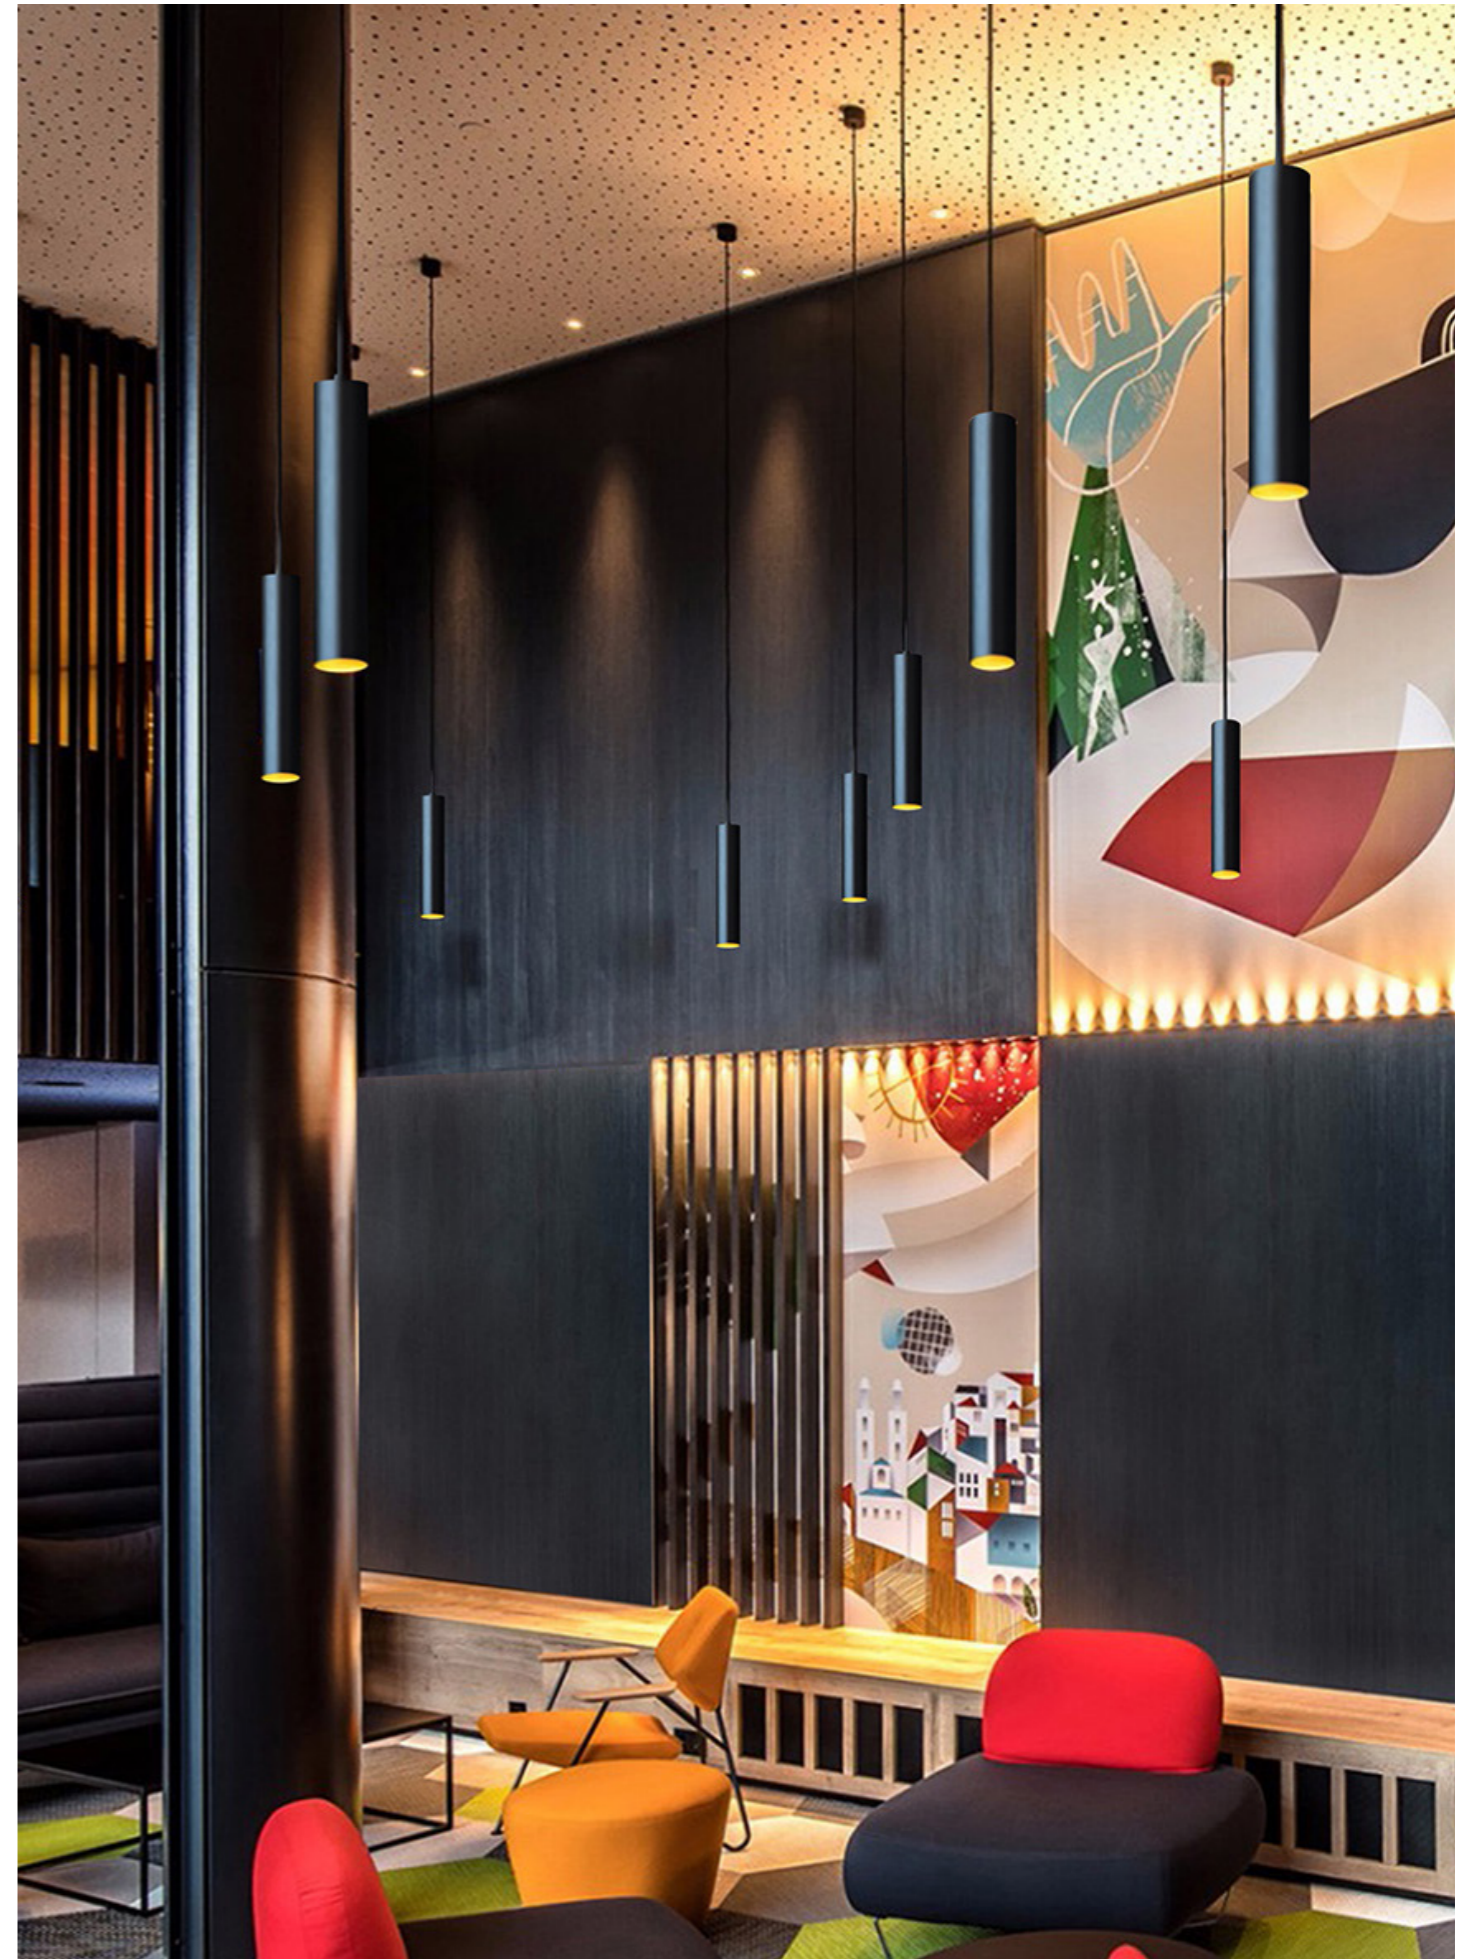

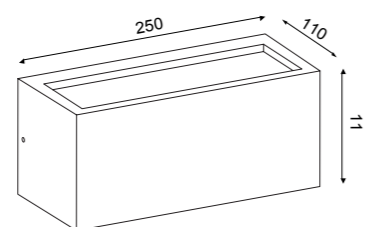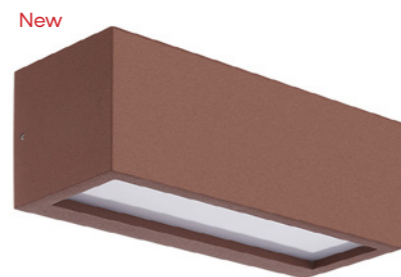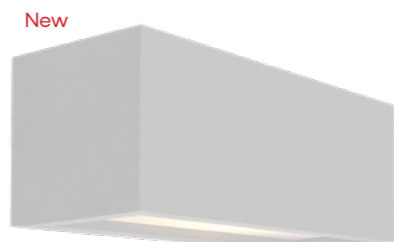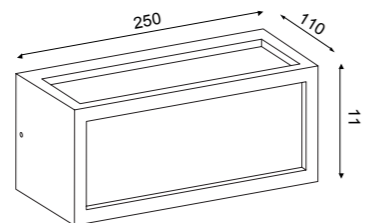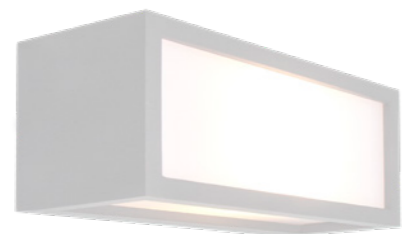

REFERENCE	BULB NO INCLUDED	FINISH
New 8352	1L x E27	Gris Oscuro-Dark Grey
New 8353	1L x E27	Blanco-White
New 8354	1L x E27	Corten-Corten
7050	1L x E27	Gris Oscuro-Dark Grey
7051	1L x E27	Blanco-White
7052	1L x E27	Corten-Corten
máx. 20W LED (No incl)		100-240V ~ 50/60Hz Aluminio-Aluminium

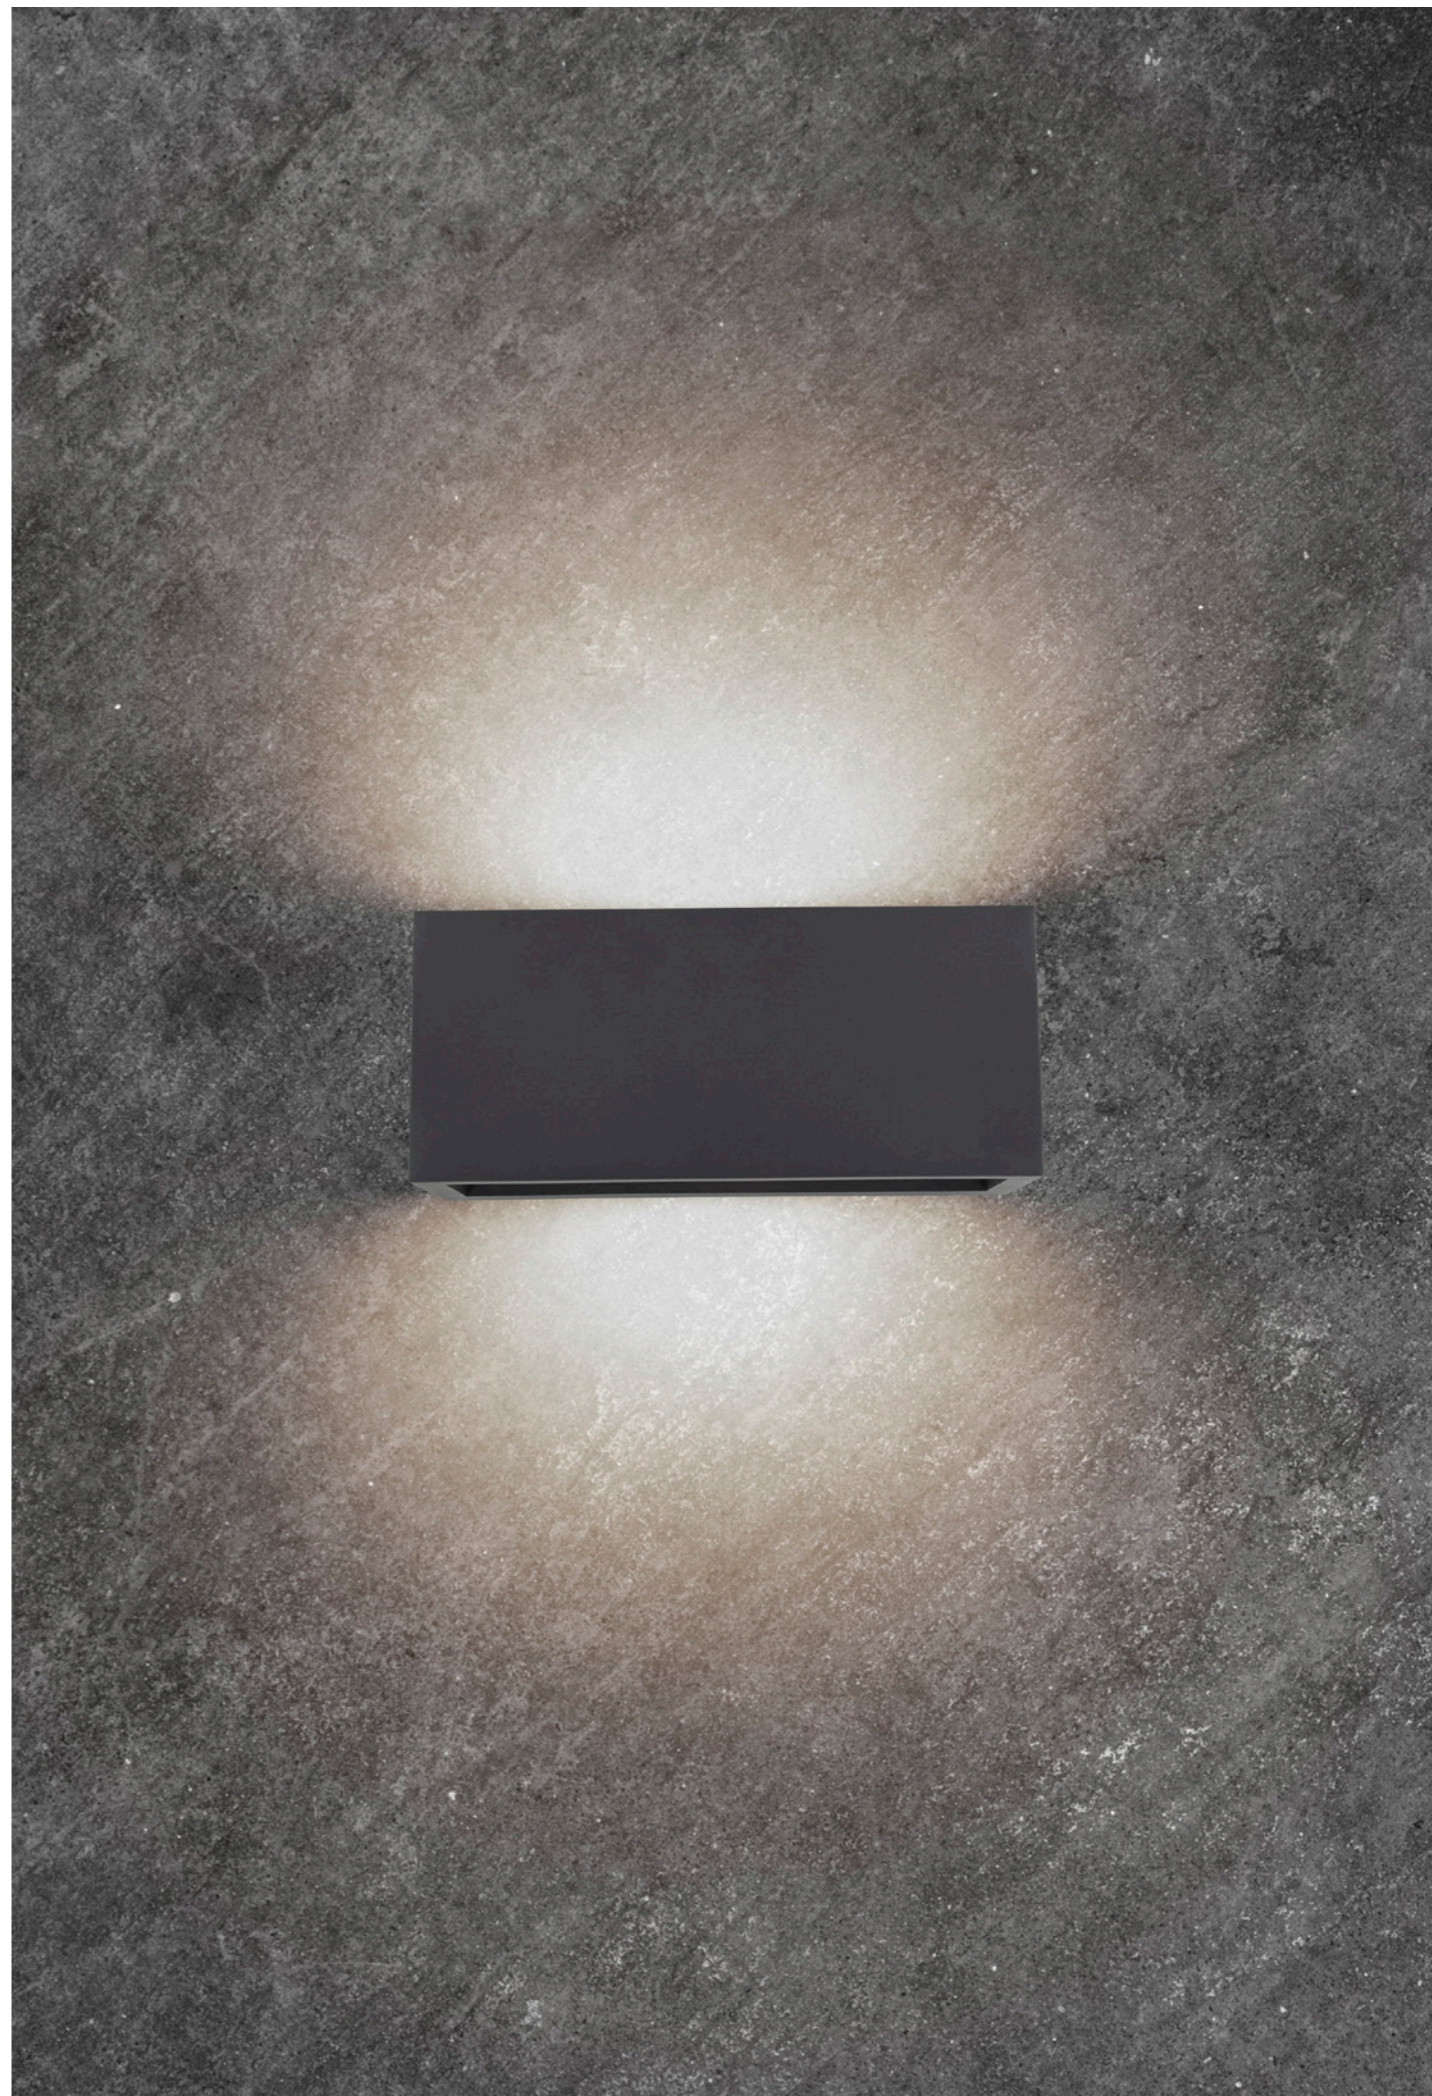

NOT INCLUDED



IP65



GLOBAL MANUFACTURING AND TRADING COMPANY S.L

Pol. Ind. Los Vientos. Calle Alisio, parcela nº4

46119 Náquera · Valencia · Spain

Tel. +34 96 160 99 50

info@mantraco.org

www.mantrailuminacion.com